

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 15 TOWNSHIP 14 RANGE 2

DATE: ~~10-02-02~~ 11-1-07

PARTY CHIEF: ~~Wilcoxen~~ Greene

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-23-98

IN. S.P.C. E ZONE NAD '83

NAME: 14021504

N: 489357.9151(m)

E: 45002.0314(m)

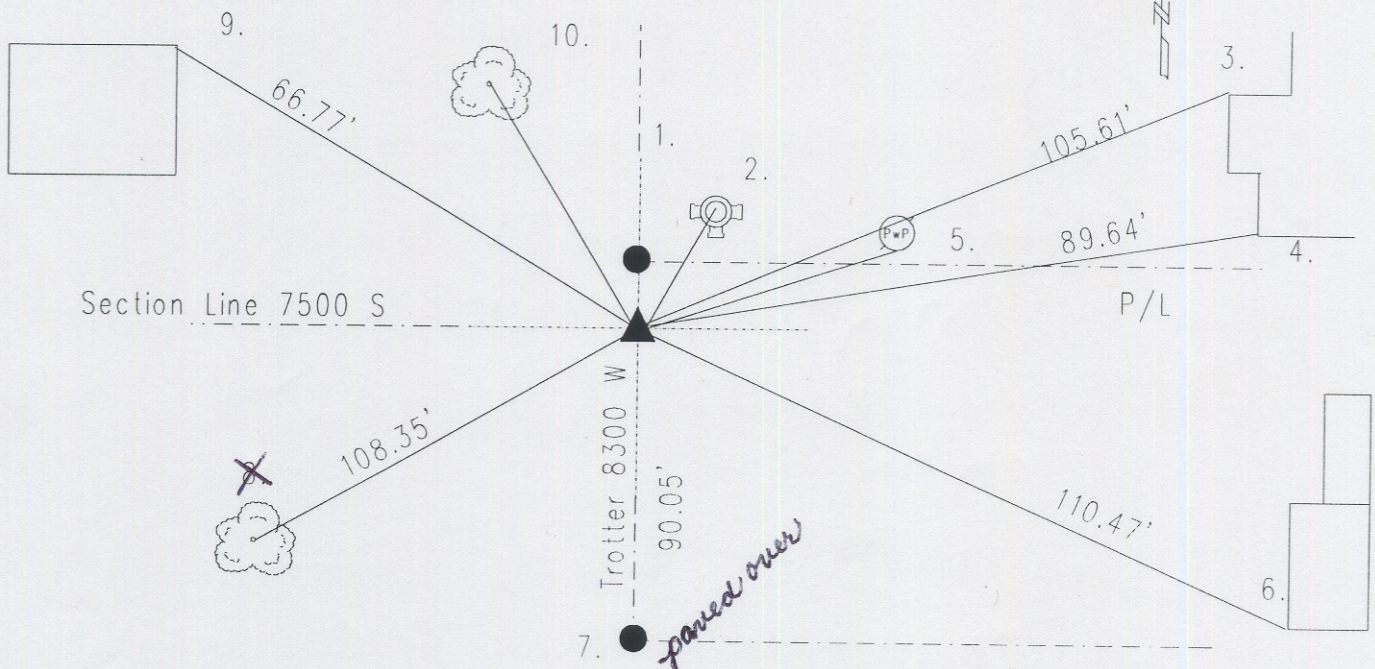

Original post set 1820 by Laughlin with witness: 12" white oak N 26 W 17 links, 18" beech S 25 E 45 links per Marion County Atlas pg. 1. Fatout 9-6-1877 called stone per Decatur Township Legal Survey Book pg. 28. Unversaw 10-14&15 1958 called same per Decatur Township Legal Survey Book pg. 54. 5-1-44 called same. 10-6-58 called railroad spike over stone. 12-3-74 called stone with cut 'x' down 7". Excavated 6-14-89 stone found 8" down. Harrison set. Re-tied 7-23-98 by Wilcoxen. Re-tied 10-02-02 by Wilcoxen.

REF.	DISTANCE	DESCRIPTION
1.	9.96'	Due N to 'Holloway' capped rebar P/L
2.	23.68'	Top nut of fire hydrant
3.	105.61'	NW corner of garage for ADDRESS 7471
4.	89.64'	SW corner of "
5.	20.46'	PK nail S PwP no #
6.	110.47'	SW corner of ADDRESS 7501
7.	90.05'	Due S to railroad spike found
8.	108.35'	Mag nail w/brass washer E 18" hackberry 12" up
9.	136.43'	NE corner of building stone & frame
10.	66.77'	PK nail w/shiner W 40" catalpa 12" up